


BFcut 全时速镀层丝

产品特点：
特殊的镀层结构，保证优异的冲洗性能，优化放电条件，使加工效率提升 20%；
自动穿丝便捷，适用于大众型机床。

Full Speed Zinc Coated Wires

Product Feature:
Special coating structure, to ensure excellent process performance, cutting efficiency up to 20%;
Good for auto-threading, suitable for most EDM machine.

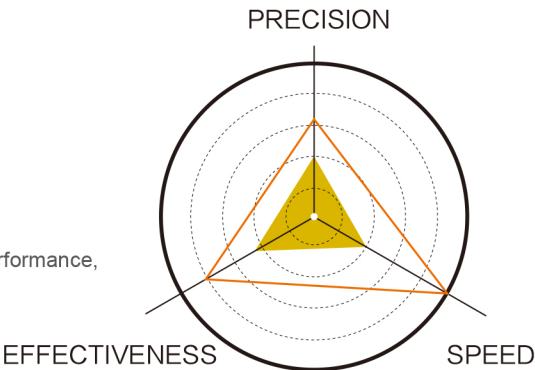

产品系列 Product Series	芯材结构 Core material	镀层特点 Coating feature	抗拉强度 Tensile Strength	导电率 Conductivity	穿丝方式 Threading
BFcut T	CuZn37	Multi-CuZn	900Mpa	19%IACS	Auto threading
BFcut G	CuZn40	Multi-CuZn	900Mpa	20%IACS	Auto threading
BFcut X	Cu	Thick CuZn 30μm	500Mpa	75%IACS	—

Φ[mm]	0.10	0.15	0.20	0.25	0.30
P3			●	●	●
P5			●	●	●
P10			●	●	●
P15			●	●	●
DIN125			●	●	●
DIN160			●	●	●
DIN200			●	●	●
DIN250			●	●	●

注：栏中有●表示的，表示为常用规格，推荐使用。
Note: The type with dot in column are usual used model, strongly recommended.

适用行业： Applicable industries



.....